



Assembly instructions

RIO VISTA SEAT

STEP 1: COMPONENTS

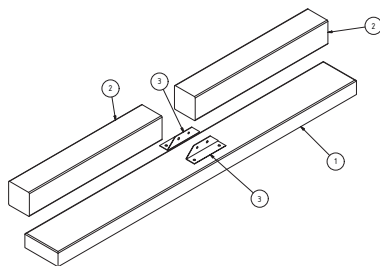


STEP 2: ATTACHING BRACKETS TO LEGS



Place bracket over pre-drilled holes in leg and affix coach screws.

STEP 3: ATTACHING LEGS TO SEAT




Align assembled legs above pre-drilled holes in seat underside. Make sure brackets are facing outwards. Screw into seat using M8 coach screws.

STEP 3: INSTALLATION INSTRUCTIONS

- Lay seat on ground to mark the centre of each hole. Dig holes 400mm deep and place 10mm stones in bottom of hole.
- Make sure top of bench is 450 above ground level, adjust stone as required.
- Stand seat up in hole and make sure it is level and square, use a brace if necessary.
- Fill holes with concrete making sure seat remains level and square.

FLAT PACKED SEAT ON ARRIVAL

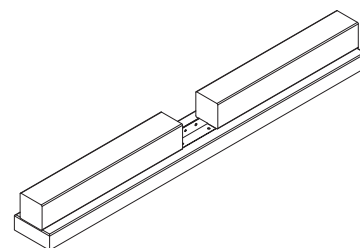

Parts List - Per Seat

Item	Qty	Assembly Name
1	1	200x75 seat
2	2	125x125 seat legs
3	2	50x2EA (angle bracket)
4	8	M8 coach screws

TOOLS REQUIRED:

- Shifting spanner

